


Installation Instructions

Ground Fixed

Cadenza
Page 1 of 3



Components:

-  x4
M8 Nyloc Nut
-  x2
M6x20 Security Screw
-  x4
2 Part Cover Cap
-  x1
M6 Saddle Strap

Metric
Conversion:
250mm/ 10"
400mm/ 15 3/4"
550mm/ 21
21/32"
700mm/ 27 9/16"
850mm/ 33
15/32"
1.5m/ 59"



Weight of heaviest part **7kg** (Cadenza)

1. Attach the steel legs to the base of the instrument with the M8 Nyloc Nuts and 2 part security caps. **(1.1)** (See Assembly Guide)



2. Attach Ground Fixing posts to legs **(1.2)** (See Ground Fix Post Installation Sheet)

3. Excavate **1 hole** for the Steel legs **250mm diameter** by **400-550mm deep** depending on Key stage, in desired location upon decision from customer.

4. Locate (lower) legs into holes making sure they are vertical and level prior to concreting in place.

5. Once happy with location of the Instrument, **fill holes** using rapid hardening **concrete**. Be sure to compact concrete around legs and leave to dry according to manufactures guidelines.

6. Attach the 1 pair of beater to the saddle strap on the leg. **(1.3)**

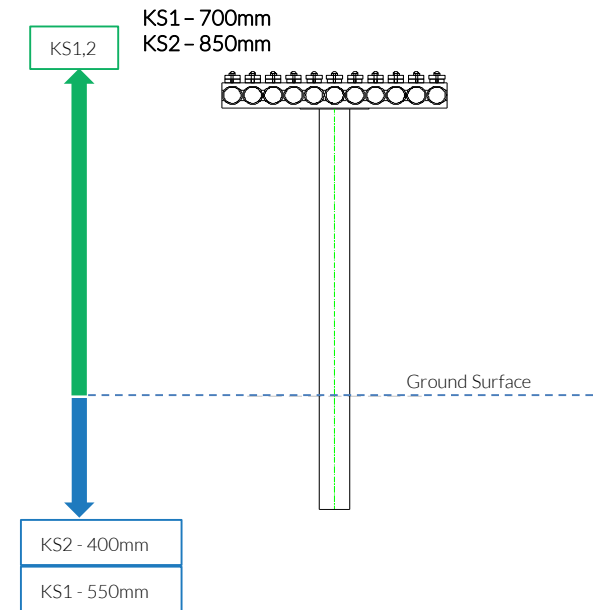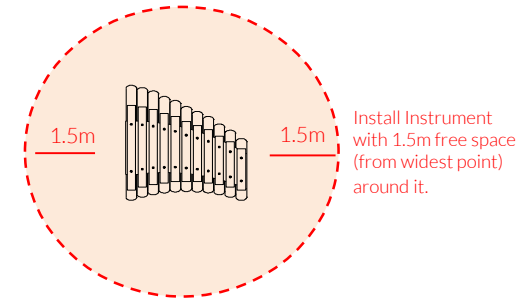

Pair Small Red Beaters X1

Ground Fix Components:





Spares available from www.musical-play.com or from your local distributor

14 Kg

Assembly Guide PPCADE



Tools:


 x1
  x1







Ground Fixed
Cadenza
Page 2 of 3

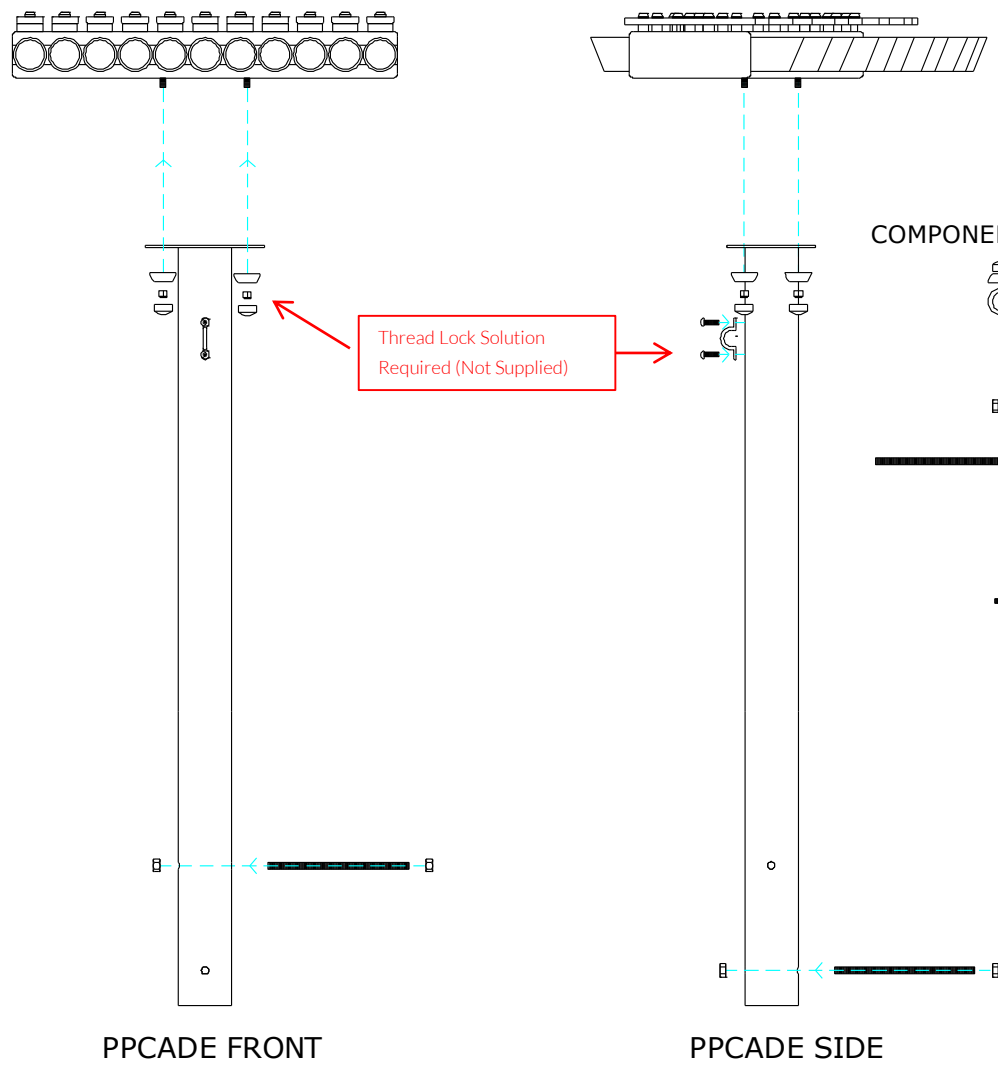

- Instrument Components:
-  x4
M8 Nyloc Nut
 -  x2
M6x20 Security Screw
 -  x4
2 Part Cover Cap
 -  x1
M6 Saddle Strap

Thread Lock Solution
Required (Not Supplied)



- COMPONENTS LIST:
-  2 Part Cover Cap X4
 -  M8 Nyloc nut X4
 -  M10 Nut X4
 -  M10x200 Threaded Bar X2
 -  Saddle Strap X1
 -  M6x20 Pin torx X2



Pair Small Red Beaters X1



- Ground Fix Components:
-  x2
M10x200 Bolt
 -  x4
M10 Nut

Spares available from
www.musical-play.com or
from your local distributor

14 Kg

Ground Fix Post Installation


Foundations should not present a hazard. These foundations are recommended as a guide, for more information on foundation details for various surface see Part 7 of BS EN 1176.

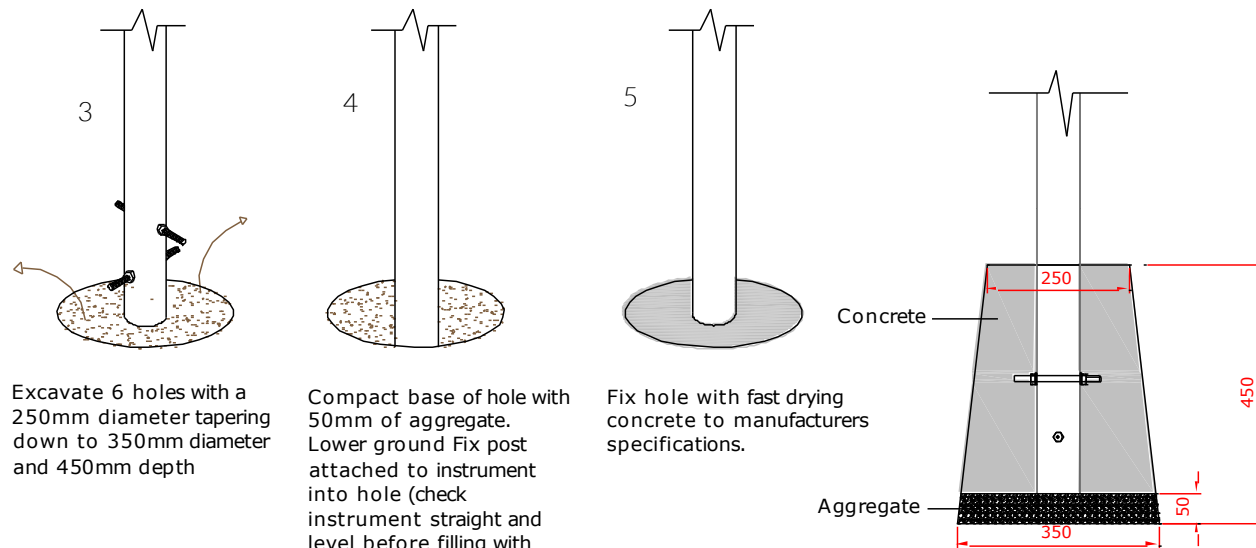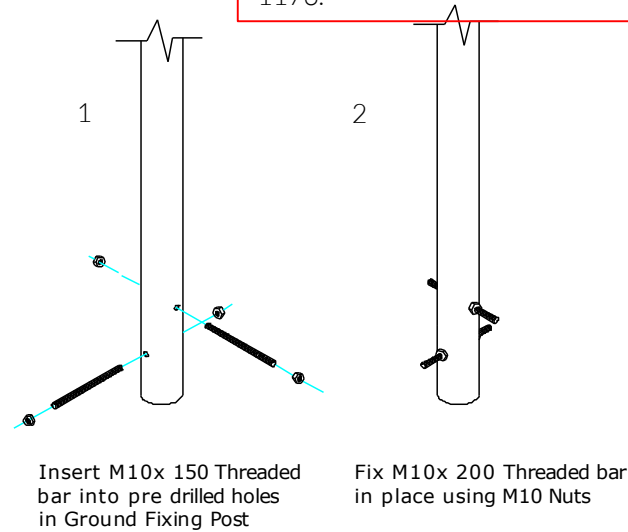

400mm min depth

Ground Fixed

Cadenza
Page 3 of 3



Components:



Metric Conversion:
50mm/ 2"
250mm/ 10"
350mm/ 14"
400mm/ 16"
450mm/ 18"