



Installation Instructions



Surface Fixed Calypso Quatro Post Page 1 of 3

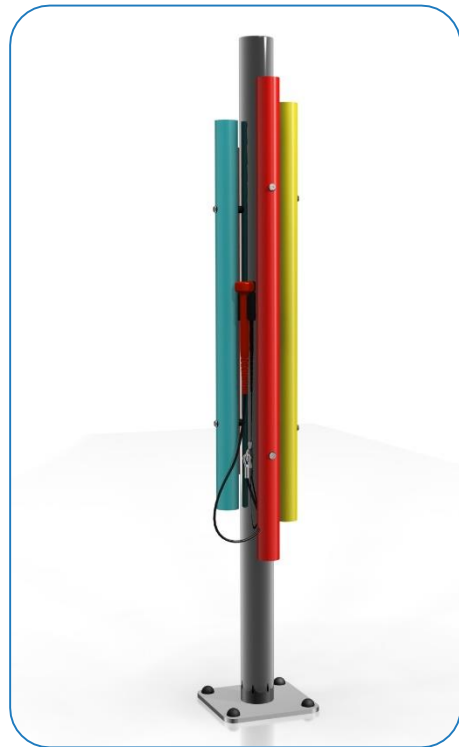

Weight of heaviest part 7.5kg

1. Instrument will arrive on site fully assembled. **(1.1)**
(See Assembly Guide)



2. Attach Surface Fixing posts to legs **(1.2)** (See Ground Fix Post Installation Sheet)

3. **Locate Plate** in desired location and mark holes to fix to desired surface.

4. Fix to Surface using recommended ground anchors not supplied

5. Make sure all fixings are covered and secure using cover caps provided

6. Attach the holders, beaters and the saddle straps on side of the post. **(1.3)**

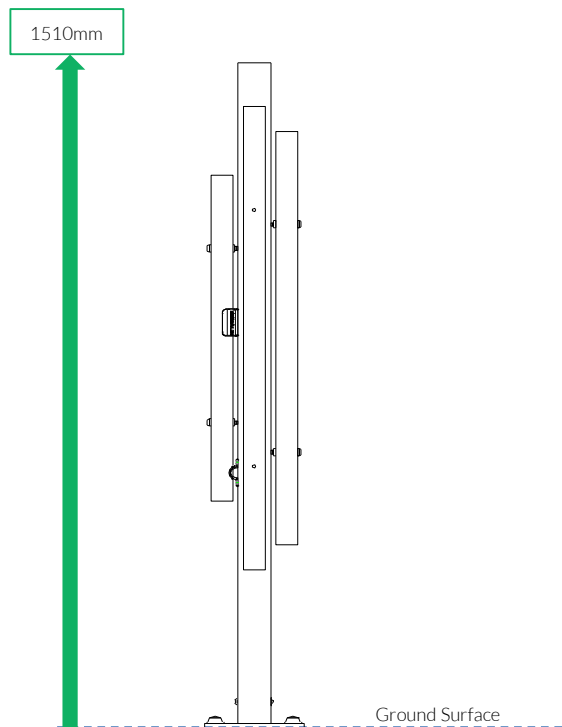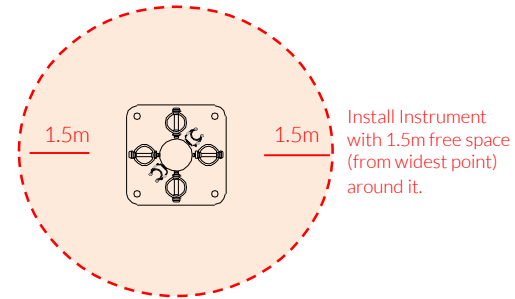

Instrument Components:



x8

M6x20 Security Screw



x2

M6 Saddle Strap



x4

M6 Square Nut



x2

Beater Holder

Metric Conversion:
1510mm/ 59"
1.5m/ 59"



Pair Small Red
Beaters X1

Surface Fix
Components:



x1

M10x70 Security Screw



x1

M10 Barrel Nut


Spares available from
www.musical-play.com or
from your local distributor


14 Kg


Assembly Guide PPCALQU



Tools:

 x1
TX 30 Driver Bit

 x2
TX 45 Driver Bit




Surface Fixed Calypso Quatro Post Page 2 of 3



Instrument Components:

-  x8
M6x20 Security Screw
-  x2
M6 Saddle Strap
-  x4
M6 Square Nut
-  x2
Beater Holder

Thread Lock Solution
Required (Not Supplied)

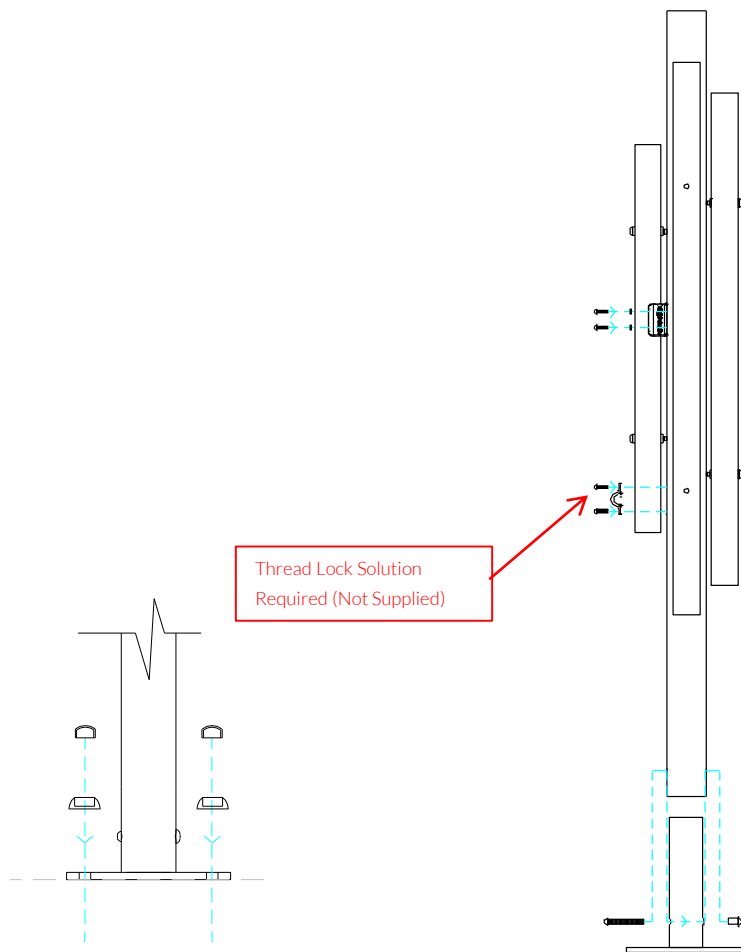



COMPONENTS LIST:

-  2 Part Cover Cap X4
-  Saddle Strap X2
-  M6x20 Pin torx X8
-  M10x70 Pin torx X1
-  M10 Barrel Nut Pin torx X1
-  M6 Square Nut X4
-  Beater Holder X2



Pair Small Red
Beaters X1

Surface Fix Components:

-  x1
M10x70 Security Screw
-  x1
M10 Barrel Nut

Spares available from
www.musical-play.com or
from your local distributor

14 Kg

Ground Fix Post Installation

Surface Fixed Calypso Quatro Post Page 3 of 3



Components:



x1

M10 Barrel Nut




x1

M10x70 Security Screw


Thread Lock Solution
Required (Not Supplied)

1

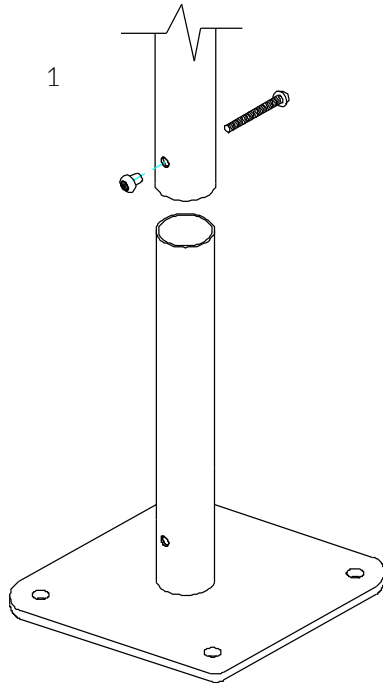


Locate the Surface fix Plate into the leg of the instrument.

2

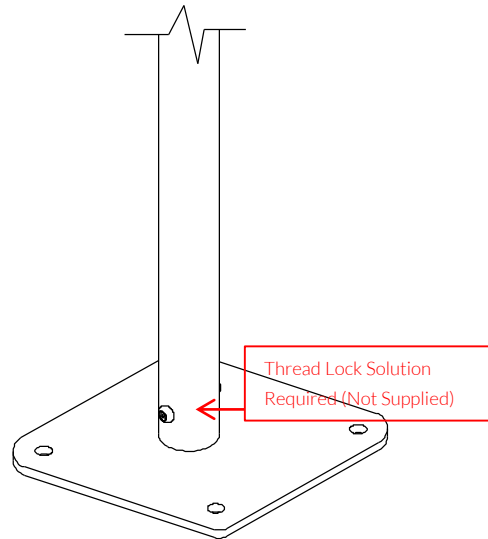

Fix instrument to Surface fix plate using M10 bolt and Barrel Nut and use **thread locking solution** to prevent fixings working loose.

3

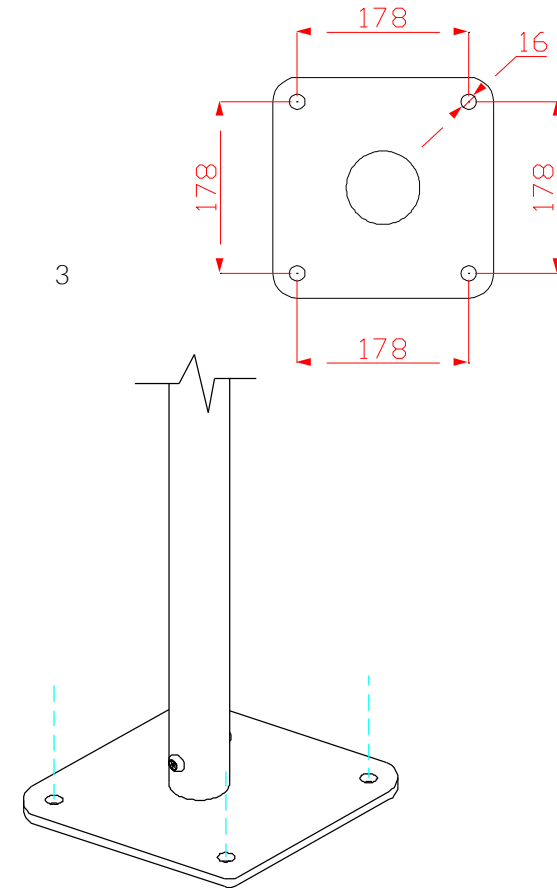

Fix Surface Plate to the ground surface **Ground Anchors Not provided** cover fixings with caps provided