

Surface Fixed

Handpipes Page 1 of 3



Instrument Components:

Instrument assembled


Metric Conversion: 250mm/10" 400mm/16" 905mm/35" 1.5m/59"

Installation Instructions




1. Handpipes will arrive on site assembled, Surface Fixings will need to be installed (1.1) (See Assembly Guide)



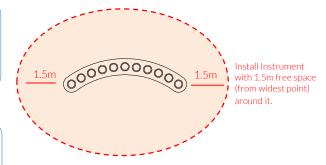




3.Locate Instrument in desired location and mark holes to fix to desired surface.

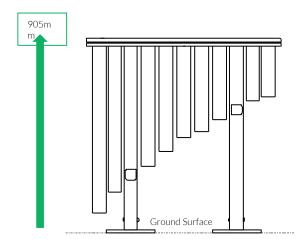

4. Fix to Surface using recommended ground anchors not supplied



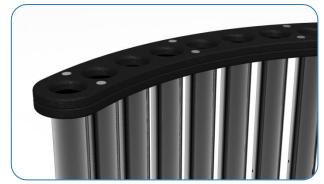

Weight of heaviest part 20kg (Handpipes)



Surface Fix Components:







Ground Anchors not supplied

Assembly Guide PPHAND




Surface Fixed Handpipes



Instrument Components:

Instrument assembled

Thread Lock Solution Required (Not Supplied)

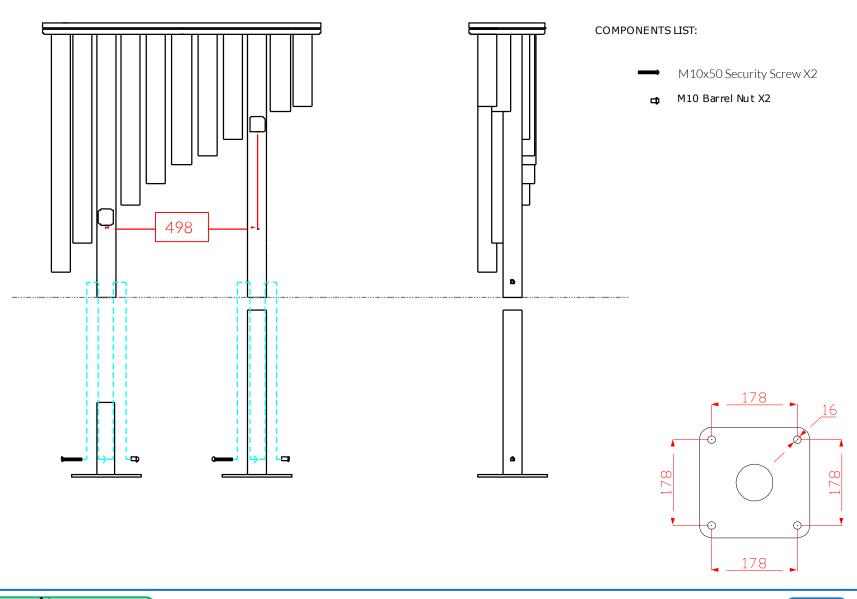













Surface Fix Post Installation



Surface Fixed

Handpipes Page 3 of 3



Components:

€ x2

M10 Barrel Nut




M10x50 Security Screw




2 Part Cover Cap

Thread Lock Solution Required (Not Supplied)


Metric Conversion: 50mm/2" 250mm/10" 350mm/14" 400mm/16" 450mm/18"

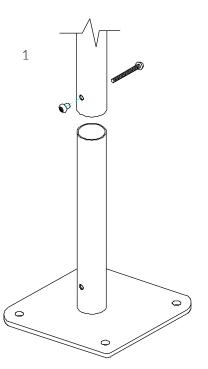

Locate the Surface fix Plate into the leg of the instrument.

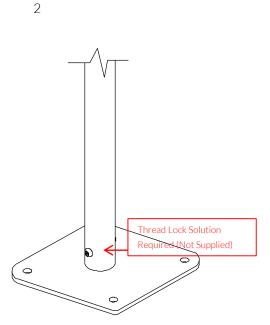

Fix instrument to Surface fix plate using M10 bolt and Barrel Nut and use thread locking solution to prevent fixings working loose.

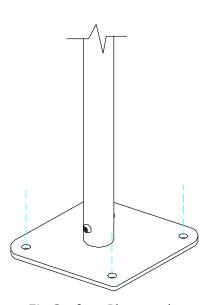

3

Fix Surface Plate to the ground surface Ground **Anchors Not provided** cover fixings with caps provided

Repeat Parts 1-3 for both legs